



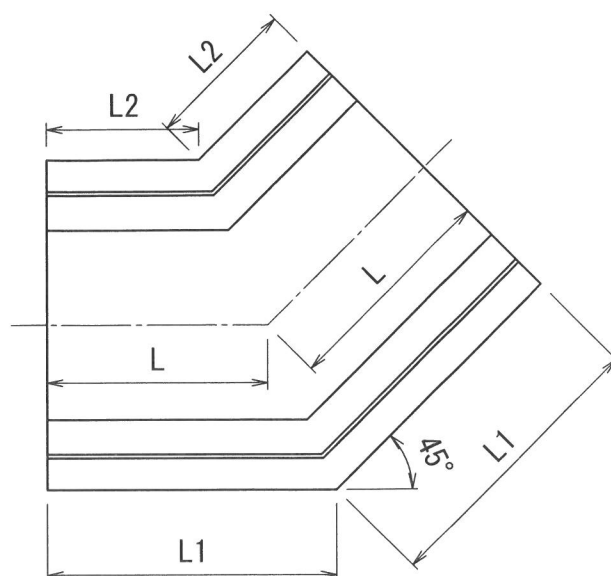

落ちふた式U形側溝電柱よけ及びコーナー(3種)

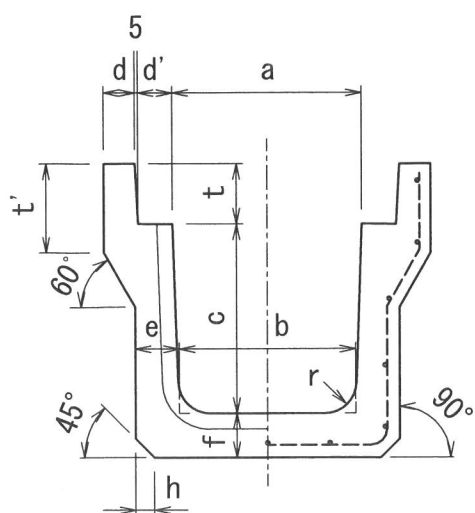

呼び名	寸 法 (mm)														参考 重量 kg
	a	b	c	d	d'	e	f	h	t	t'	r	L	L1	L2	
250A	250	230	250	45	55	65	65	30	90	120	50	351	446	256	116
250B	250	220	300	45	55	70	70	30	90	120	50	351	446	256	132
250C	250	220	350	45	55	75	75	30	90	120	50	351	446	256	150
250D	250	210	400	45	55	80	80	30	90	120	50	351	446	256	169
250E	250	210	450	45	55	85	85	30	90	120	50	351	446	256	189
250F	250	200	500	45	55	90	85	30	90	120	50	351	446	256	208
250G	250	200	550	45	55	95	90	30	90	120	50	351	446	256	231
250H	250	190	600	45	55	100	95	30	90	120	50	351	446	256	256
300A	300	280	300	50	55	70	70	30	95	140	50	351	459	243	147
300B	300	270	400	50	55	70	70	40	95	140	50	351	459	243	165
300C	300	260	500	50	55	80	80	40	95	140	50	351	459	243	204
400A	400	370	400	55	55	70	70	40	110	140	50	351	481	221	181
400B	400	360	500	55	55	80	80	40	110	140	50	351	481	221	218
500A	500	460	500	60	60	80	80	40	125	155	50	351	506	196	245
500B	500	450	600	60	60	90	90	40	125	175	50	351	506	196	295