






落ふた式U形側溝 (Pu2~3型)

JIS A 5372
(推奨仕様E-3)

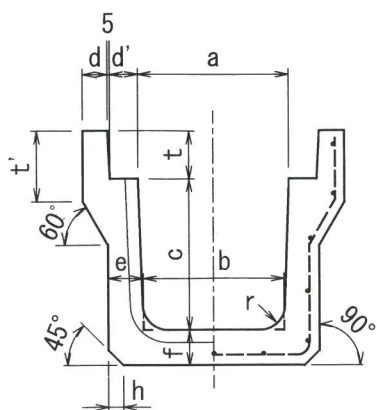

目地部詳細図

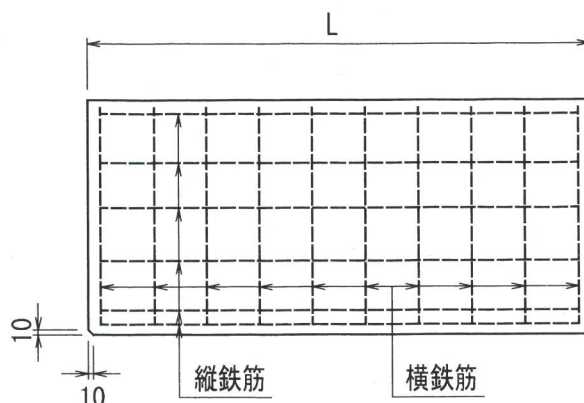

種 類	呼び名	寸 法 (mm)											鉄 筋								参考重量 (kg/m)	曲げ強度 (kN/m)	
													横 鉄 筋						縦 鉄 筋				
		a	b	c	d	d'	e	f	h	t	t'	r	L	外側鉄筋		底板内側鉄筋		材質及び 径 (mm)	数量 (本)				
														材質及び 径 (mm)	数量 (本) L=2000 L=1000	材質及び 径 (mm)	数量 (本) L=2000 L=1000						
1 種 (PU-2)	250	250	230	250	40	55	55	55	20	90	120	50	2000	4.00又は W4	10	6	—	4.00又は W4	11	144	22		
	300A	300	280	300	40	55	60	60	20	95	120	50		4.00又は W4	10	6		4.00又は W4	11	173	22		
	300B	300	270	400	40	55	65	65	20	95	120	50		4.00又は W4	10	6		4.00又は W4	13	209	25		
	300C	300	260	500	40	55	70	70	20	95	120	50		5.00又は W5	10	6		4.00又は W4	15	247	29		
	400A	400	370	400	40	55	65	65	20	110	135	50	又は 1000	5.00又は W5	10	6		4.00又は W4	14	227	19		
	400B	400	360	500	40	55	70	70	20	110	135	50		5.00又は W5	10	6		4.00又は W4	16	267	22		
	500A	500	460	500	45	60	70	70	20	125	150	50		5.00又は W5	10	6		4.00又は W4	17	295	18		
	500B	500	450	600	45	60	75	75	20	125	150	50		D6、W6 又は6.00	10	6		4.00又は W4	21	338	20		
3 種 (PU-3)	250	250	230	250	45	55	65	65	30	90	120	50	2000	5.00又は W5	20	10	5.00又は W5	20	10	4.00又は W4	13	166	37
	300A	300	280	300	50	55	70	70	30	95	140	50		5.00又は W5	24	12	5.00又は W5	24	12	4.00又は W4	13	208	36
	300B	300	270	400	50	55	70	70	40	95	140	50		D6又は W6	19	11	D6又は W6	10	6	4.00又は W4	15	234	37
	300C	300	260	500	50	55	80	80	40	95	140	50		D6又は W6	21	11	D6又は W6	11	6	4.00又は W4	17	291	49
	400A	400	370	400	55	55	70	70	40	110	140	50	又は 1000	D6又は W6	23	12	D6又は W6	12	6	4.00又は W4	17	257	28
	400B	400	360	500	55	55	80	80	40	110	140	50		D6又は W6	23	12	D6又は W6	12	6	4.00又は W4	19	316	37
	500A	500	460	500	60	60	80	80	40	125	155	50		D6又は W6	23	12	D6又は W6	12	6	4.00又は W4	20	348	30
	500B	500	450	600	60	60	90	90	40	125	175	50		D6又は W6	23	13	D6又は W6	13	7	4.00又は W4	24	423	38
許 容 差		±3						—		±3		—		±6		—							

豊洋コンクリート株式会社