




上ふた式U形側溝ふた (PC1~2型)

JIS A 5372
(推奨仕様E-2)

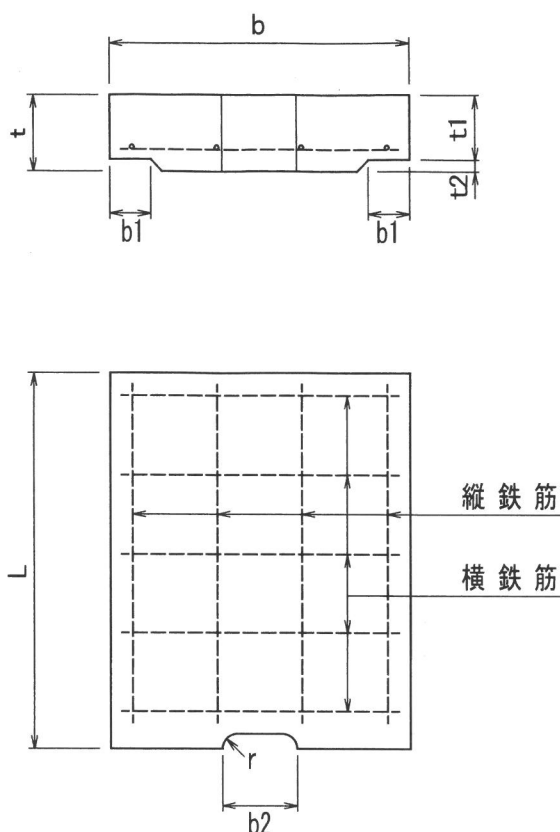

種 類	呼び名	寸 法 (mm)								鉄 筋				参 考 重 量 (kg)	曲 げ 強 度 (kN)
										縦 鉄 筋		横 鉄 筋			
		b	b1	t	t1	t2	r	b2	L	材質及び 径 (mm)	数量(本)	材質及び 径 (mm)	数量(本)		
1 種 (PC-1)	150	210	35	35	30	5	15	75	600	2.60	3	2.60	5	10.0	5
	180	250	40	40	35	5	15	75	600	2.60	3	3.20	6	14.0	6
	240	330	50	45	40	5	15	90	600	3.20	4	3.20	6	20.0	8
	300	400	55	60	50	10	15	100	600	3.20	4	4.00	6	32.0	10
	360	460	55	65	55	10	18	120	600	3.20	4	5.00	6	40.0	10
	450	560	60	70	60	10	18	120	600	4.00	5	D6	5	53.0	10
	600	740	75	75	65	10	18	150	600	4.00	6	D6	6	76.0	10
2 種 (PC-2)	150	210	35	90	80	10	15	75	600	D6	3	D6	5	26.0	45
	180	250	40	90	80	10	15	75	600	D6	3	D6	6	30.0	40
	240	330	50	100	85	15	15	90	600	D6	3	D10	5	44.0	35
	300	400	55	100	85	15	15	100	600	D6	4	D10	5	54.0	30
	360	460	55	100	85	15	18	120	600	D6	5	D10	6	62.0	30
	450	560	60	120	100	20	18	120	600	D6	6	D10	6	91.0	40
	600	740	75	150	130	20	18	150	600	D6	6	D10	6	152.0	45
許 容 差		±3	±2			—			±3	—					